



Kiama

1500 BACK TO WALL BATH · SPECIFICATION SHEET



SIZE

1500 mm

FORM

Fluted back to wall

FINISHES


Gloss or Matte White

OVERFLOW

Integrated

Kiama 1500 Back to Wall Bath

1500 · 1700

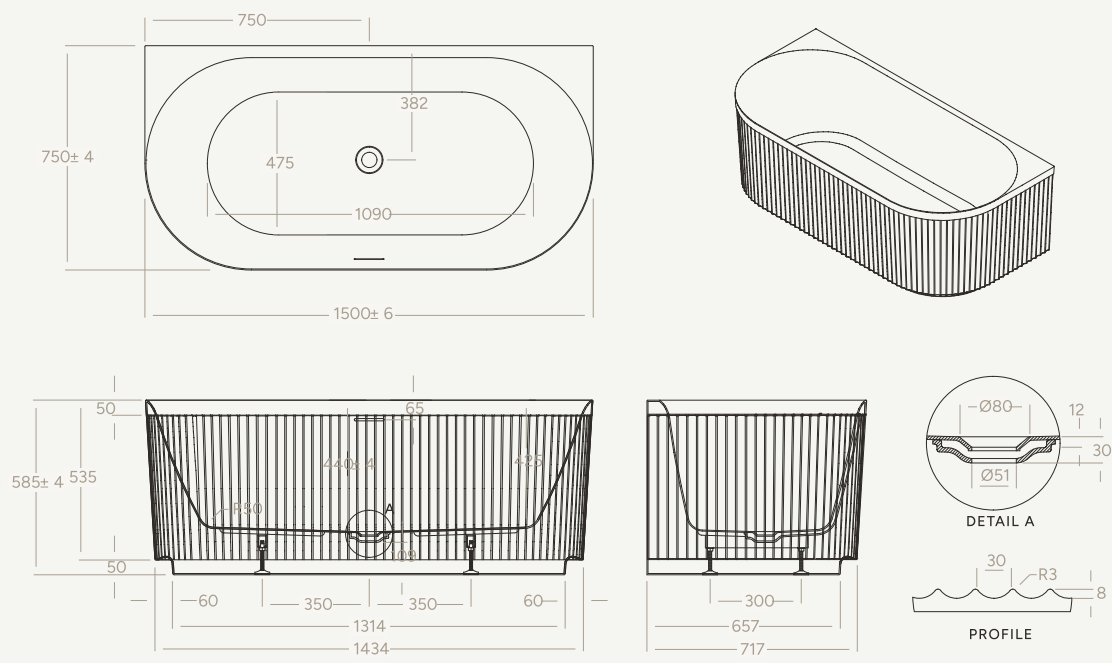

Dimensions

Overall length	1500 ± 6
Overall width	750 ± 4
Overall height	585 ± 4
Waste outlet	Ø51

Finishes

Gloss White
OVKIA15VBTWG
Matte White
OVKIA15VBTWM

Details

Exterior	V-groove fluted
Support frame	Built-in steel
Feet	Adjustable
Capacity	233 L
Bath weight	40 kg

Overall dimensions in millimetres, from the manufacturer's drawing; tolerances as marked. All other dimensions are shown on the drawing above. Capacity and bath weight as published by the manufacturer. Do not rough in plumbing or tile until the bath is on site and measured. Both finishes share every dimension on this sheet. Order by the code shown.

Finishes and Installation

15_{yr}
WARRANTY


Lucite
SANITARY-GRADE
ACRYLIC

233_L
CAPACITY

Finishes



Gloss White
OVKIA15VBTWG



Matte White
OVKIA15VBTWM

Both finishes share every dimension on this sheet. Order by the code shown.

Installation Notes

Bath waste

Suits a 40 mm bath waste with overflow. Plug and waste are not included; choose one from the full range.

Floor preparation

Floor preparation may be required for off-centre waste positions. Discuss with your builder or plumber before tiling and waterproofing.

Removable waste

In some cases Australian building codes require a fully removable bath waste. Consult your plumber prior to installation.

Delivery

1530 × 780 × 610 mm

Approximate packaged size, length × width × height.

48 kg

Approximate packaged weight. Allow two people to carry the bath into position.

Measure First

Overall dimensions carry the manufacturing tolerances shown on the drawing. Have the bath on site and measure it before setting out plumbing or tiling.