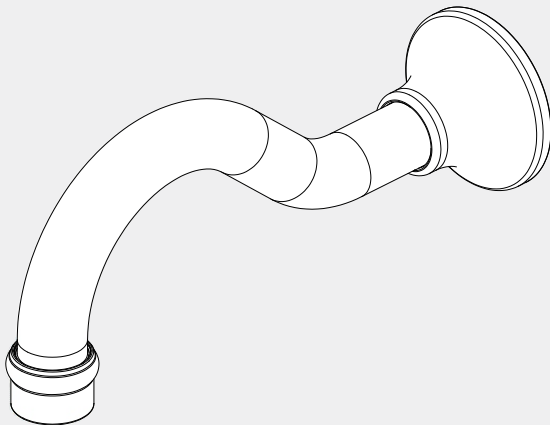


York Bath Spout Only

Nero

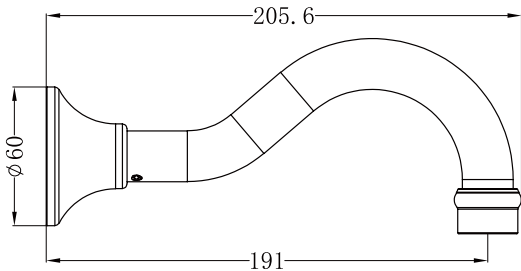


Lead Free



Versions:202506

Drawing



Specifications

Watermark License
WM-060073

Temperature Rating
Min 1°C-Max 75°C

Pressure Rating
Min 150kpa - Max 500kpa

Packaging Includes

1x Spout
1x Installation Kit

Finish & SKU

 **Chrome**
NR692103CH

 **Matte Black**
NR692103MB

 **Aged Brass**
NR692103AB

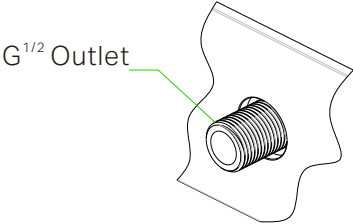
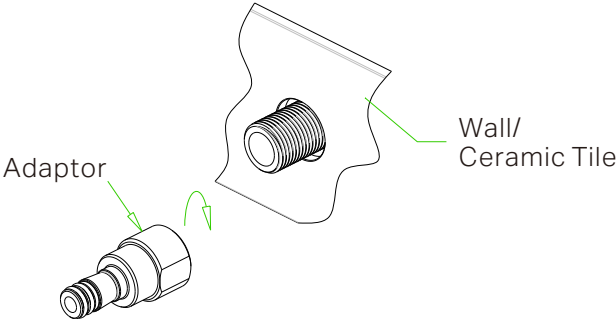
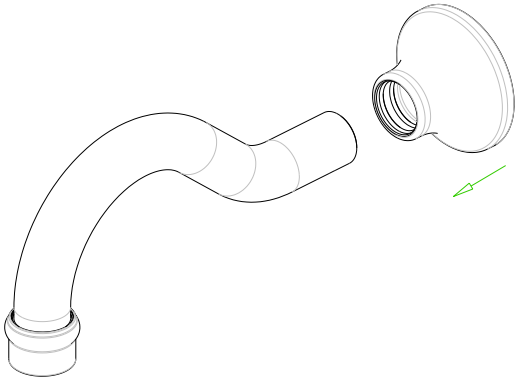
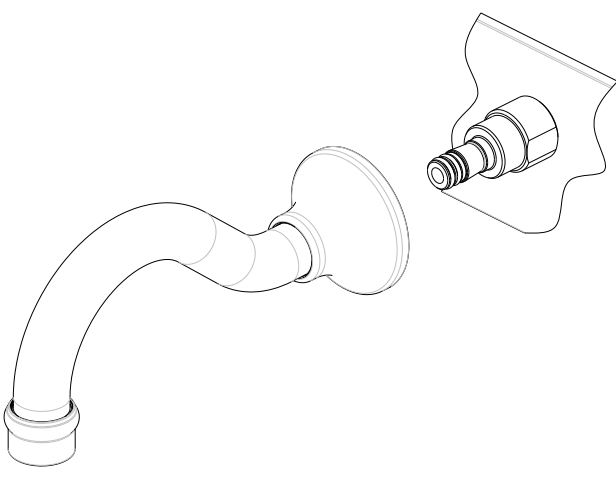
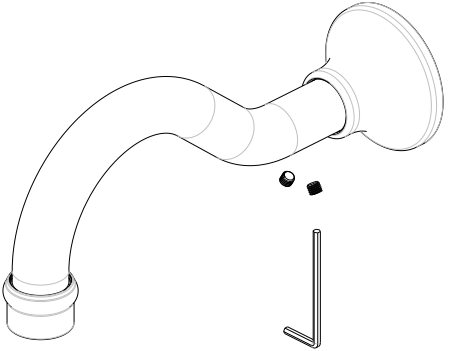
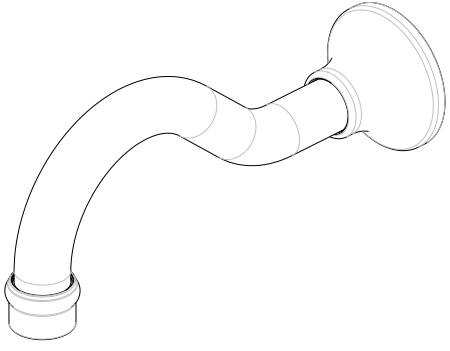
 **Brushed Nickel**
NR692103BN

*Dimensions are nominal measurements only.

Installation Instruction

GENERAL INSTRUCTIONS:

- This product must be installed by a licensed plumber. Ensure that your plumbing installation conforms to the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

1  1. Apply thread sealant or teflon tape on outlet thread.	2  2. Screw adaptor on to outlet. Make sure the face of inlet is flush with wall/ceramic tile face.	 3. Pull back plate on together with spout.
 4. Pull spout onto adaptor.	 5. Tighten grub screw into spout by wrench and cover by silicone cap.	 6. Finish.

MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

FINAL INSPECTION:

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

Nero

