


York Wall Basin Set

Nero




Lead Free

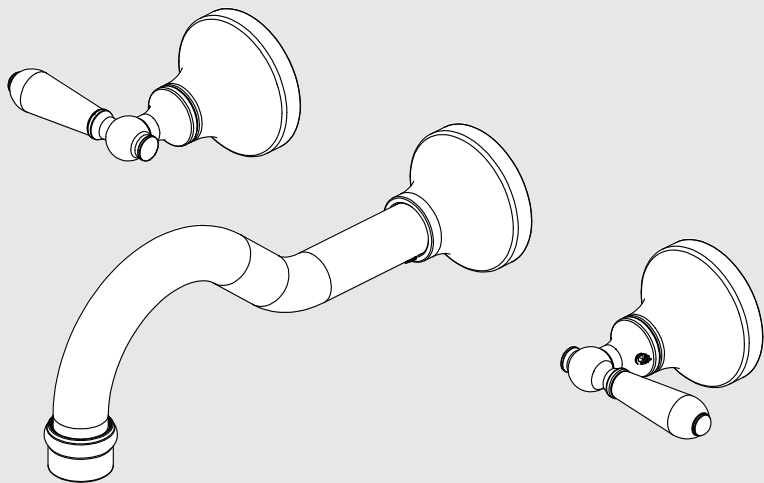

Versions:202506



Drawing

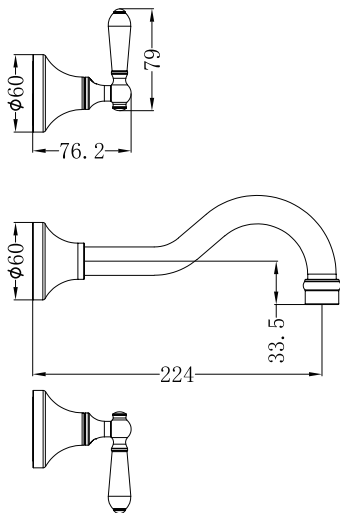

Specifications

Watermark License
WM-060073
Temperature Rating
Min 1°C-Max 75°C
Pressure Rating
Min 150kpa - Max 500kpa

Packaging Includes



1x Spout
2x Wall Top Handles
1x Non-Restricting Aerator

Finish & SKU


	CHROME WITH WHITE PORCELAIN LEVER NR692107a01CH		CHROME WITH METAL LEVER NR692107a02CH
	MATTE BLACK WITH WHITE PORCELAIN LEVER NR692107a01MB		MATTE BLACK WITH METAL LEVER NR692107a02MB
	AGED BRASS WITH WHITE PORCELAIN LEVER NR692107a01AB		AGED BRASS WITH METAL LEVER NR692107a02AB
	BRUSHED NICKEL WITH WHITE PORCELAIN LEVER NR692107a01BN		BRUSHED NICKEL WITH METAL LEVER NR692107a02BN
	CHROME WITH BLACK PORCELAIN LEVER NR692107a03CH		

*Dimensions are nominal measurements only
**Includes an additional non-restricting aerator for bath use


Note: In Wall Body/ Breech Not Included.

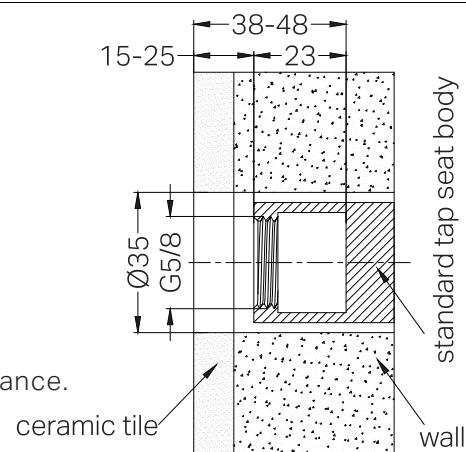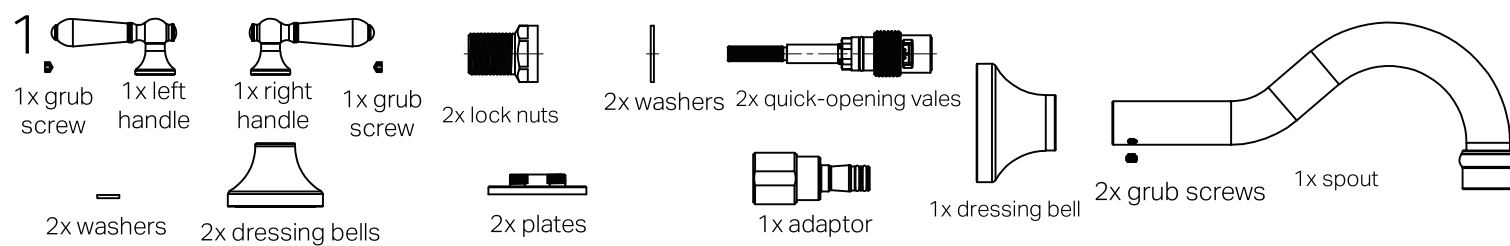


- Install the breech (not included) in advance.

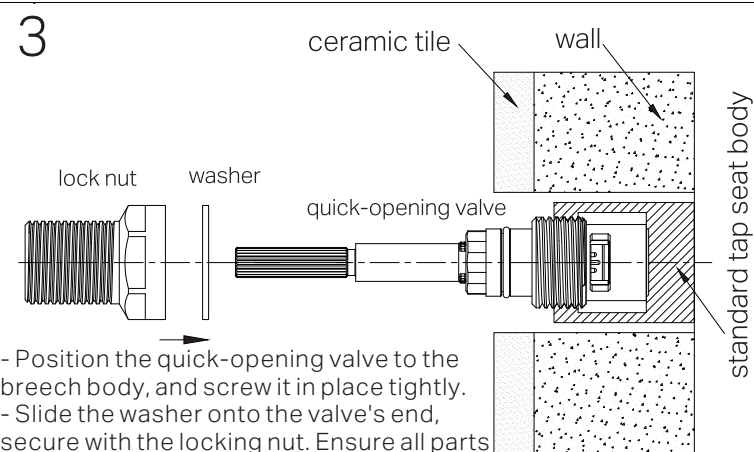


- Position the quick-opening valve to the breech body, and screw it in place tightly.
- Slide the washer onto the valve's end, secure with the locking nut. Ensure all parts are snug.
- Test for leaks.

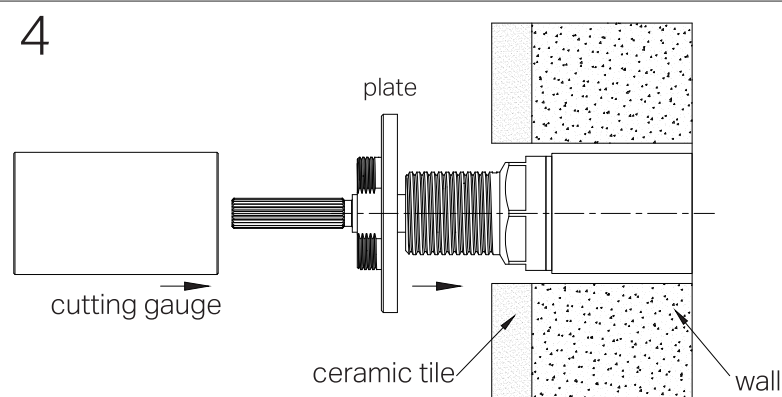


-Screw the plate and cutting gauge onto the lock nut tightly, ensuring a secure fit.

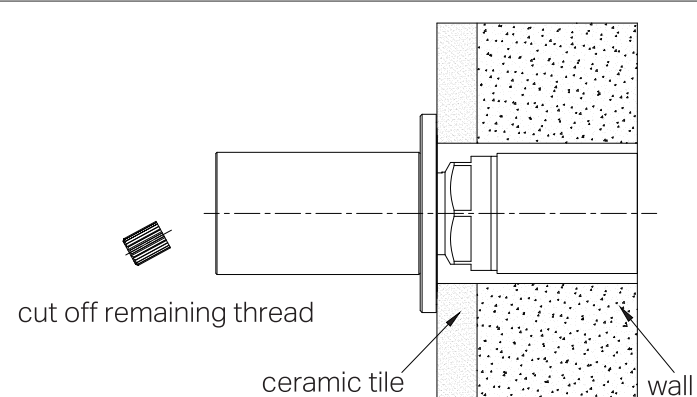


- Trim the excess thread flush with the cutting gauge.
- Smooth the trimmed edge.
- Test for leaks.

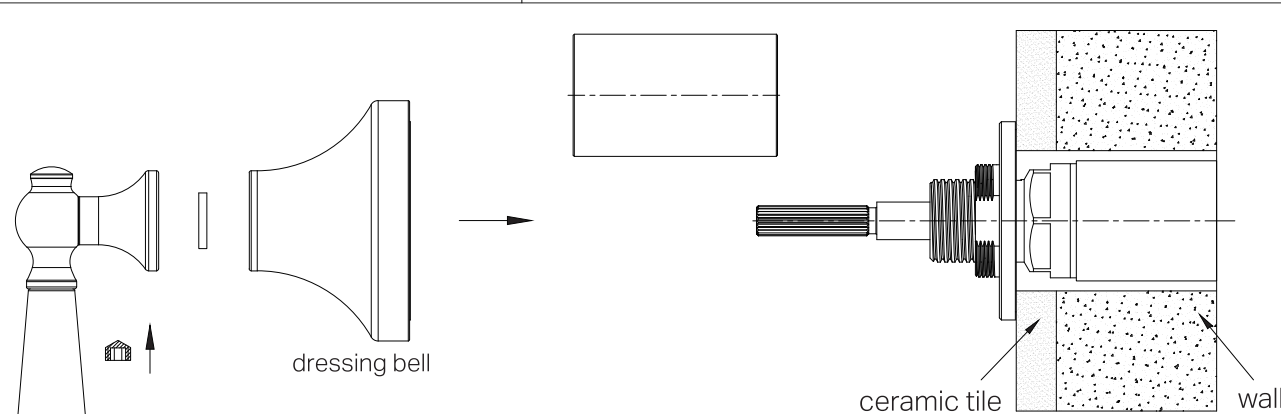

- Remove the cutting gauge.
- Attach the dressing bell.
- Place the washer inside the handle, fit it onto the tap body, and secure with the grub screw.

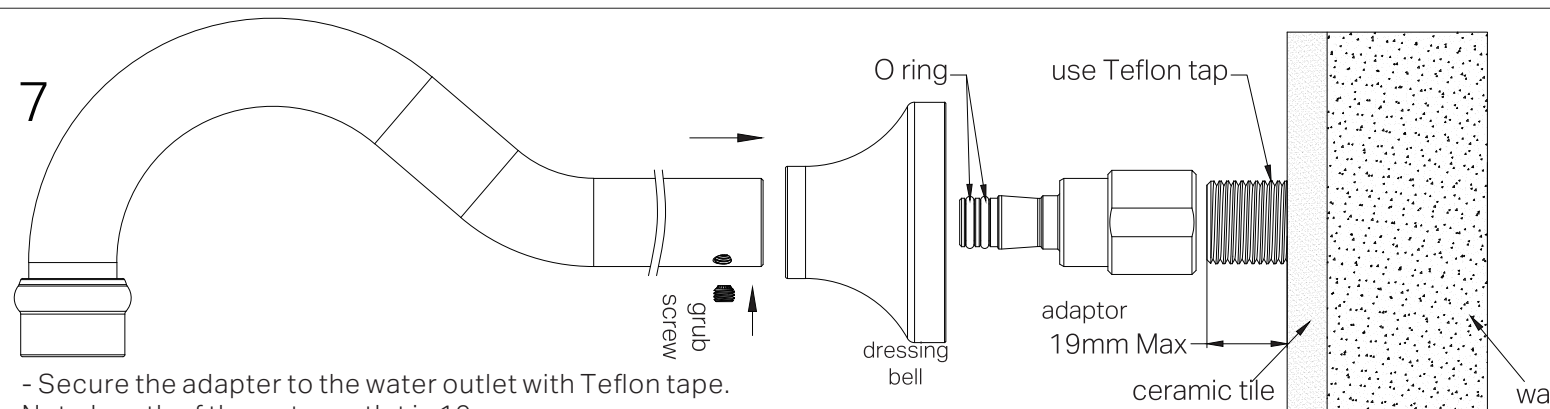

- Secure the adapter to the water outlet with Teflon tape.
- Note: length of the water outlet is 19mm max.
- Fit the dressing bell over the adapter.
- Slide the spout into the dressing bell and fasten using the grub screw.
- Test for leaks.

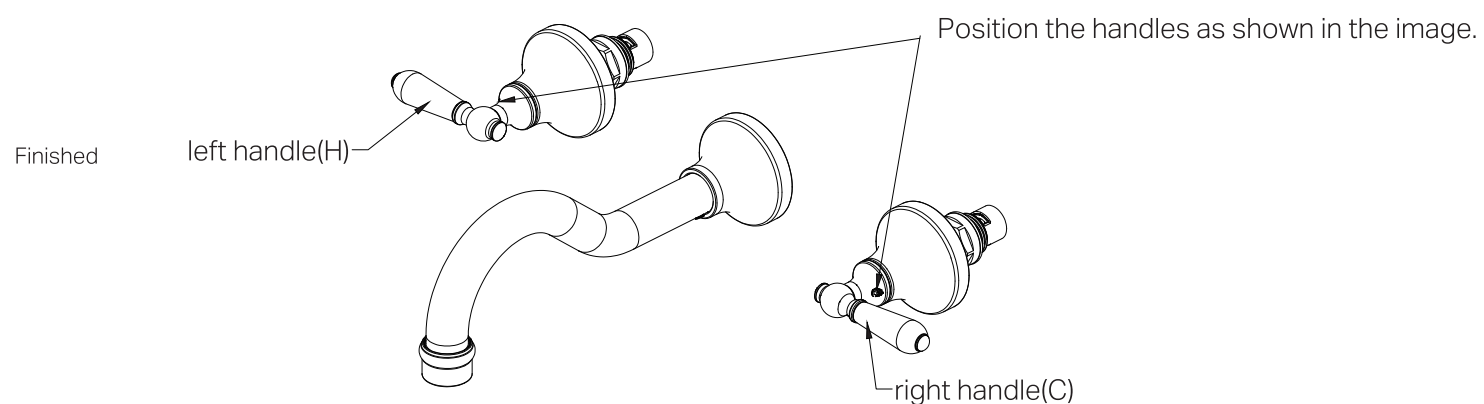

Nero

