



York Wall Top Assemblies

Nero





Lead Free

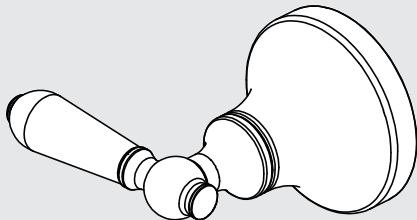

Versions:202506

Drawing



Specifications

Watermark License

WM-060073

Temperature Rating

Min 1 °C-Max 75 °C

Pressure Rating

Min 150kpa - Max 500kpa

Packaging Includes

2x Wall Top Handles



CHROME WITH WHITE PORCELAIN LEVER
NR692109b01CH



MATTE BLACK WITH WHITE PORCELAIN LEVER
NR692109b01MB



AGED BRASS WITH WHITE PORCELAIN LEVER
NR692109b01AB



BRUSHED NICKEL WITH WHITE PORCELAIN LEVER
NR692109b01BN



CHROME WITH BLACK PORCELAIN LEVER
NR692109b03CH



CHROME WITH METAL LEVER
NR692109b02CH



MATTE BLACK WITH METAL LEVER
NR692109b02MB



AGED BRASS WITH METAL LEVER
NR692109b02AB



BRUSHED NICKEL WITH METAL LEVER
NR692109b02BN

Note: In Wall Body/ Breech Not Included.

*Dimensions are nominal measurements only.

1

1x grub screw

1x left handle

1x right handle

1x grub screw

2x lock nuts

2x washers

2x quick-opening vales

2x washers

2x dressing bells

2x plates

2

15-25

38-48

23

Ø35

G5/8

ceramic tile

wall

standard tap seat body

- Install the breech (not included) in advance.

3

lock nut

washer

quick-opening valve

ceramic tile

wall

standard tap seat body

- Position the quick-opening valve to the breech body, and screw it in place tightly.

- Slide the washer onto the valve's end, secure with the locking nut. Ensure all parts are snug.

- Test for leaks.

4

cutting gauge

plate

ceramic tile

wall

- Screw the plate and cutting gauge onto the lock nut tightly, ensuring a secure fit.

5

cut off remaining thread

ceramic tile

wall

- Trim the excess thread flush with the cutting gauge.

- Smooth the trimmed edge.

- Test for leaks.

6

dressing bell

ceramic tile

wall

Finished

Position the handles as shown in the image.

- Remove the cutting gauge.

- Attach the dressing bell.

- Place the washer inside the handle, fit it onto the tap body, and secure with the grub screw.

Nero — 3

York Wall Top Assemblies – Manual

Nero

