


Mixer Type	35 mm cartridge
Operating Pressure	Min: 150 kPa / 1.5 bar Max: 500 kPa / 5 bar Optimum: 350 kPa / 3.5 bar
Operating Temperature	Hot: Max 80°C Cold: Min. 5°C
Inlet Connections	1/2" BSPP
Suitable Hot Water Units	Storage tank and continuous flow only. Not suitable for gravity feed.

General Information

- This product must be installed by a qualified licensed plumber in accordance with AS/NZS 3500 and all applicable local regulations and plumbing codes.
- All pipe work must be thoroughly flushed prior to installation.
- Do not remove the ceramic cartridge from the mixer when installing.
- After installation all hoses and connections must be checked for leaks.
- It is the responsibility of the installer to ensure a waterproof seal is achieved between the product and mounting surface.

Installation

- IMPORTANT:** Before commencing installation, turn off the water supply. While not essential, we recommend fitting isolation valves to both the hot and cold-water supply.
1. Remove product from packaging and check for damages. If the product is damaged in any way, do not install and return to the store where the item was purchased.
 2. Fasten screws (2) to secure the mixer assembly in place.
 3. Attach water supply to the hot and cold water inlets as marked on the body (3).
 4. When all other plumbing has been fitted, turn on the water supply and check carefully for leaks. Re-tighten fittings if necessary.
 5. During wall construction ensure that the mounting threads are exposed to allow fitting of the cover sleeves, cover plate, handle, and spout.
 6. Once the wall has been finished, remove the protective cover (9) by removing the screw (1).
 7. Push the cover sleeve (14) over the cartridge sleeve (7) and screw into place.
 8. Push the cover plates (12 and 23) over the cartridge sleeve (14) and spout connector (4) respectively until they are flush with the wall.
 9. Fit the handle and spout (13 and 5) onto their respective bodies (15 and 4).
 10. Use the allen keys (10) and screw the grub screws (16 and 11) into the back of the handle and spout to secure. Fit the hole cap (17) on the handle.

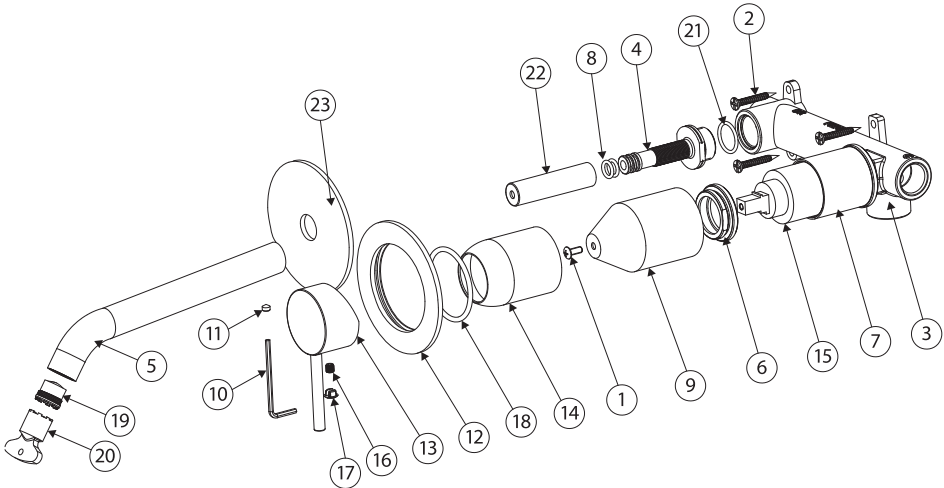

Cleaning & Care

- We recommend weekly cleaning with mild soapy water and a microfibre cloth. In highly polluted or coastal locations we recommend cleaning 2-3 times per week. Please note that colour tapware requires more frequent cleaning than chrome tapware.
- Never use harsh detergents, citrus-based cleaners or abrasive cleaners, as these will scratch the surface. Use of unsuitable cleaners may damage the surface and will not be covered by warranty.
 - Where your tapware remains dry in use, a non-abrasive soft cloth can be used to remove surface dust.
 - Use of wax-based furniture cream should be avoided as these can result in a build-up of deposits which could detract from the appearance.
 - Do not use undue pressure and wipe in one direction only.

1	M4 x 10 Screw	9	Protective Cover	17	Hole Cap
2	ST4 x 25 Screw	10	2.5 mm Allen Key	18	O-Ring 49 x 3
3	Body	11	M5 x 4 Screw	19	Aerator
4	Spout Connector	12	Handle Cover Plate	20	Aerator Key
5	Spout	13	Handle	21	O-Ring 21 x 2
6	Lock Nut	14	Cover Sleeve	22	Protective Sleeve
7	Cartridge Sleeve	15	35 mm Cartridge	23	Spout Cover Plate
8	O-Ring	16	M5 x 5 Screw		