

Warranties

Residential: Applies to domestic uses and applications of Fienza® products, such as private dwellings and retirement villages.

Commercial: Applies to commercial uses and applications of Fienza® products, including, but not limited to: commercial food premises such as restaurants; commercial accommodation such as hotels; hospitals and healthcare facilities; public amenities; and industrial, laboratory and manufacturing facilities.

Product Component	Domestic Use	Commercial Use
Ceramic Disc Cartridges	LIFETIME replacement parts or product, LIFETIME labour	15 years replacement parts or product, 1 year labour
Mixer (Structure Only)	LIFETIME replacement parts or product, 1 year labour	5 years replacement parts or product, 1 year labour
Finishes - Chrome	LIFETIME replacement parts or product, 1 year labour	5 years replacement parts or product, 1 year labour
Finishes - PVD & Electroplated	5 years replacement parts or product, 1 year labour	1 year replacement parts or product, 1 year labour
Accessories & Spare Parts	1 year replacement parts or product	1 year replacement parts or product

Note: Warranties do not include parts subject to wear and tear such as O-rings, washers and jumper valves.

Australian Consumer Law

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Warranty Conditions

- Installation has been carried out by a licensed tradesperson in accordance with AS/NZS 3500 and all applicable local regulations and plumbing codes.
- All care and cleaning instructions have been adhered to as prescribed.
- All maintenance and adjustments to the product after the installation have been carried out by a licensed tradesperson.
- Proof of purchase is required for warranty claims.

Warranty Limitations

To the extent permitted under the Trade Practices Act and other relevant legislation, Fienza’s liability is limited to: the cost of replacing the goods; or, the cost of obtaining equivalent goods; or, the cost of having the goods repaired. Fienza is not responsible for any lack of operation or performance of goods (or any loss or damage) where goods are used or adapted for use with other goods not supplied by Fienza. It is the responsibility of the customer and installer before installation to ensure that all components are correct and free of obvious visible faults. Fienza is not responsible for the labour and rectification costs incurred in the above circumstance.

Conditions for On-Site Warranty Service Calls

Fienza will charge a service fee for each visit to site where it is determined that the fault has occurred due to incorrect installation, or unlicensed installation, or where the product is not a genuine Fienza product, or where the product is outside of the warranty period. The customer must agree prior to the service agent attending, that should any of the above be true, they will be financially responsible for the service fee. Payment will then be necessary within 30 days of the site visit.

If the product is found to be truly faulty, Fienza will remain responsible for the service fee.

ⓘ PLEASE LEAVE THIS GUIDE WITH THE OWNER

For warranty support, please contact Fienza
15 Walter Crescent, Lawnton QLD 4501 PO Box 5381, Brendale QLD 4500
P 07 3490 6700 F 07 3490 6719 E help@fienza.com.au ABN 76 136 411 311



Floor Mounted
Bath Mixers

For use with:

- 213112 Isabella Floor Mixer
- 213113 Kaya Floor Mounted Bath Mixer with Hand Shower
- 213113B Hustle Floor Mounted Bath Mixer with Hand Shower
- 221112 Empire Slim Floor Standing Mixer
- 234113 Empire Slim Floor Mounted Bath Mixer with Hand Shower
- 221112 Empire Floor Mounted Bath Mixer
- 221113 Empire Floor Mounted Bath Mixer with Hand Shower
- 202113 Eleanor Floor Mounted Bath Mixer with Hand Shower

IMPORTANT: Please read all of the instructions and check goods thoroughly before installation. Installation of received goods that are damaged, warped or faulty will void warranty. Ensure all items meet your plumbing requirements. This product is pre-assembled. Do not disassemble, as this may void the warranty.

Specifications

Please refer to **fienza.com.au** for the latest product specifications before installing.

Mixer Type	35 mm cartridge
Operating Pressure	Min: 150 kPa / 1.5 bar Max: 500 kPa / 5 bar Optimum: 350 kPa / 3.5 bar
Operating Temperature	Hot: Max 80°C Cold: Min. 5°C
Inlet Connections	1/2" BSPP
Suitable Hot Water Units	Storage tank and continuous flow only. Not suitable for gravity feed.


Note: Isabella Floor Mixer (213112) has a basin flow restrictor included

General Information

- This product must be installed by a qualified licensed plumber in accordance with AS/NZS 3500 and all applicable local regulations and plumbing codes.
- All pipe work must be thoroughly flushed prior to installation.
- Do not remove the ceramic cartridge from the mixer when installing.
- After installation all hoses and connections must be checked for leaks.
- It is the responsibility of the installer to ensure a waterproof seal is achieved between the product and mounting surface.

Installation

IMPORTANT: Before commencing installation, turn off the water supply. While not essential, we recommend fitting isolation valves to both the hot and cold-water supply.

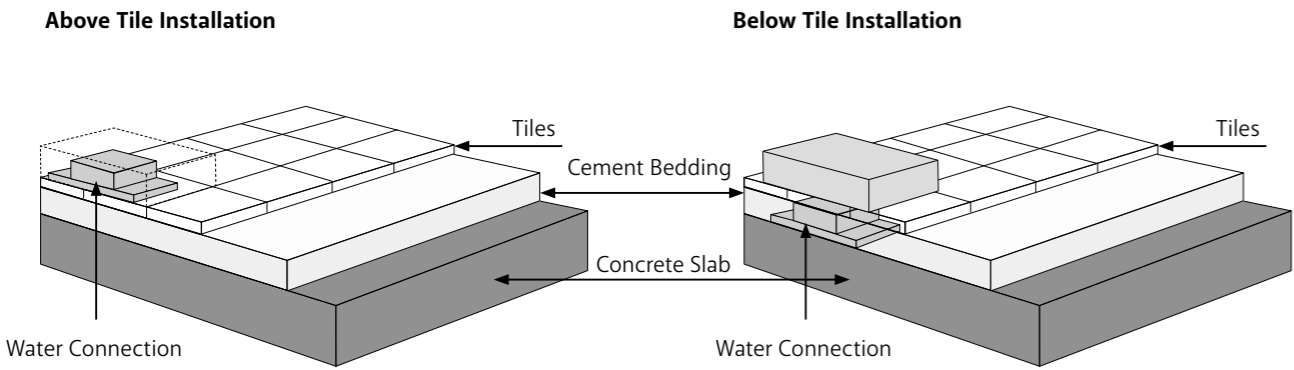

1. Draw the pre-drilling position in pencil on the floor.

Diagram showing the base plate with dimensions 84 and 36.

2. Drill holes according to the drawn mark, with a diameter of 10 mm and a depth of 45 mm.

Diagram showing a hand drilling a hole into a tiled floor.

3. Mounting explosion screw.

Diagram showing explosion screws being inserted into the base plate.

4. Discuss with your plumber/installer how the plumbing will be run, if elbows are needed we recommend installing to body now. Secure the base plate to the floor with supplied fixings.

Diagram showing the base plate secured to the floor with screws.

5. Connect hot and cold water according to the diagram, check whether there is leakage, and then lay cement and tile according to the diagram. Leave the 90 x 60 mm spare hole for installation.

Diagram showing the base plate with hot and cold water connections and a 90x60mm spare hole.

6. Remove gasket screws with Allen key provided.

Diagram showing a hand using an Allen key to remove a gasket screw.

7. Slide the base cover plate onto the mixer body from the bottom.

Diagram showing the base cover plate being slid onto the mixer body.

8. Add the base plate, adjust the hole direction to fit into the base plate.

Diagram showing the base plate being added and adjusted.

9. Push floor standing mixer into the base plate. Red water connector into H. Blue water connector into C.

Diagram showing the floor standing mixer being pushed into the base plate.

10. Fix mixer into base plate with supplied screws using Allen key.

Diagram showing the mixer being fixed into the base plate with screws.

11. Slide cover plate over the base plate.

Diagram showing the cover plate being slid over the base plate.

12. For the Floor Standing Mixer with Hand Shower: Add the hand shower to the hose. Add the hose to the mixer and put hand shower on the bracket.

Diagram showing the hand shower being added to the hose and the hose being added to the mixer.

Cleaning & Care

We recommend weekly cleaning with mild soapy water and a microfibre cloth. In highly polluted or coastal locations we recommend cleaning 2-3 times per week. Please note that colour tapware requires more frequent cleaning than chrome tapware.

- Never use harsh detergents, citrus-based cleaners or abrasive cleaners, as these will scratch the surface. Use of unsuitable cleaners may damage the surface and will not be covered by warranty.
- Where your tapware remains dry in use, a non-abrasive soft cloth can be used to remove surface dust.
- Use of wax-based furniture cream should be avoided as these can result in a build-up of deposits which could detract from the appearance.
- Do not use undue pressure and wipe in one direction only.