



Geberit Kappa Under Counter concealed cistern 15 cm, 4.5/3L



Example image

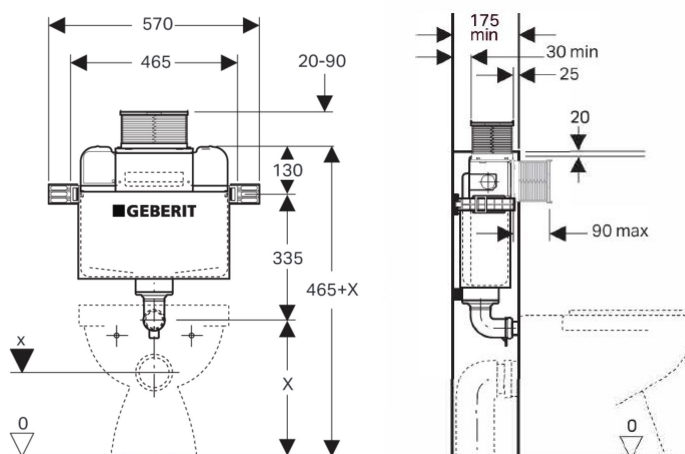

*Separate service access required with pneumatic buttons:



Application purposes

- For installation in part or room-height prewall installations
- For installation in room-height installation walls
- For floor-standing WCs
- For dual flush

Characteristics

- Adjustable in depth
- Concealed cistern with top or front actuation
- Concealed cistern, fully insulated against condensation
- Immediate post flush possible with factory setting
- Welded flush bend
- Water supply connection on the left
- Protection cover box for service opening protects against moisture and dirt
- Protection box for service opening can be cut to length without tools

Technical data

Flush volume, factory setting	4.5 and 3 l
-------------------------------	-------------

Scope of delivery

- Water supply connection Rp 1/2" - R 1/2", compatible with MF, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Flush bend extension, \varnothing 45 mm
- 2 fixing brackets
- Fastening material

Art. no.	Flush	B	H	T
110.208.00.1	4.5 / 3 L	40 cm	36 cm	13.5 cm