
York Twin Shower

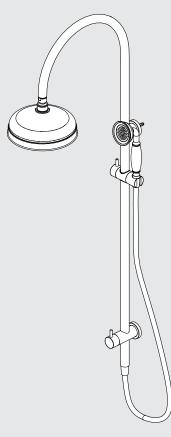

Versions:202506

Drawing 339 43 450 072 Ø50 136 Ø<u>207</u> 뎫 Top/Bottom Inlet (Switchable) ŕ 676.3 Ø25 슋 Ŧ Ø50,

Specifications

Watermark License WM-060093 Temperature Rating

Min 1°C-Max 75°C Pressure Rating

Min 150kpa - Max 500kpa

Finish & SKU



Packaging Includes

1x Hand Shower (Built-In Check Valve) 1x Shower Head 1x Shower Arm 1x Shower Rail 1x 1.5m Hose

CHROME WITH METAL HAND SHOWER NR69210502CH MATTE BLACKWITH METAL HAND SHOWER NR69210502MB AGED BRASS WITH METAL HAND SHOWER


NR69210502AB BRUSHED NICKEL WITH METAL HAND SHOWER

NR69210502BN

*Dimensions are nominal measurements only.

WATER RATING WATER

Nero

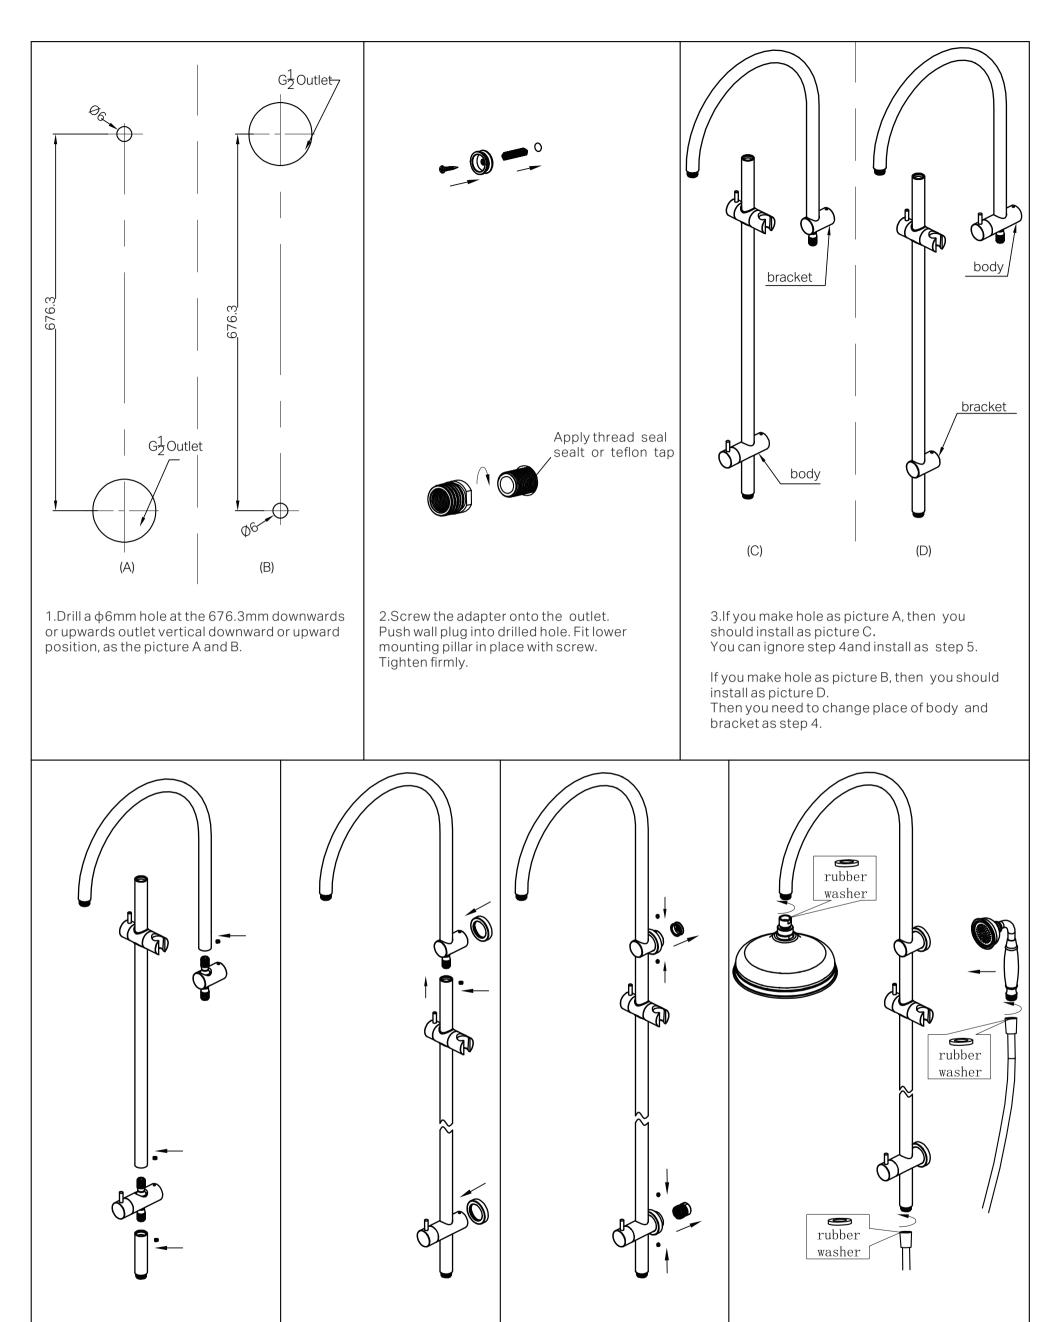

4. Unscrew 3 grub screws as picture 5.Screw shower rail into shower 6.Locate and put shower rail 7. Screw shower head to shower are with and unplug short shower rail, long arm component. Tighten firmly. assembly onto wall adaptors. care.(Notethe rubber washer in the shower short rail and shower arm one by one. Push 2 back plates onto shower Tighten grub screws firmly with head.) Change the place of body and allen key provided. Connect shower rail and hand shower with arm component and body bracket. Then plug in short shower hose. (Note rubber washer in the hose.) rail, long shower rail and shower arm TEST & CHECK FOR LEAKS and screw the 3 grub screws.



